

Fabripulse BinVent:




Equipment Features and Benefits:

- ✓ 11GA construction with integral lifting lugs
- ✓ Powder coated HRS throughout for excellent corrosion protection
- ✓ Fully sealed, sloping lid easily sheds water away from filters
- ✓ Ships palletized & fully assembled, installation requires only compressed air and 120/240V connection
- ✓ Standard equipment includes an air filter/regulator and pressure control module in NEMA 4X/6 & IP 66/67 case
- ✓ Fully contained design means no parts leave the unit during filter change out
- ✓ Clean air cartridge access coupled with quick release latches for quick filter replacement
- ✓ 28" long cartridges fit standard without extending below mating flange

BV-6

- 6 cartridges (clean air access)
Each @ 44 ft² media - 264 ft² total
- 43" W x 32 1/2" D x 42 1/4" H
- Target 700-1000CFM

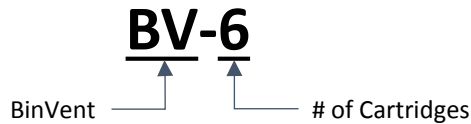

Equipment Options

- ✓ 11GA Stainless Steel construction (can be paired with FDA approved cartridges)
- ✓ Side mount fan with flange, top angled down discharge and bird screen
- ✓ Taller cartridges for larger media area



Markets & Applications:

- ✓ Food & Beverage
- ✓ Industrial Minerals
- ✓ Blending/Mixing
- ✓ Silo applications
- ✓ Pneumatic Transfer Points
- ✓ Mechanical transfer (Bucket Elevators & Chute to Belt)
- ✓ Conveyor Loading/Discharge

28" Cartridge Construction

- ✓ Urethane endcaps, with Spunbond Polyester media (standard)
- ✓ Grounded cartridges can be made available
- ✓ FDA approved cartridges can be made available (mated with Stainless Steel equipment)
- ✓ Longer length cartridges can be provided for higher CFM applications



Contact Us Today!
1.800.477.1214

